

VA Shreveport Fisher House C-300 benchmark

1 marked sheet · 20 takeoff items · quantities net of deducts, waste-adjusted where noted

Finish assignment: 20 agent-asserted · 20 pending human review

CONDITIONS

	FH	1 EA
	VALVE	5 EA
	SSMH	9 EA
	CO	2 EA
	CB	1 EA
	SS-8IN	400 LF
	SS-6IN-SERV	98.3 LF

diag · waste 0% -> 0 SF

diag2 · waste 0% -> 0 SF

cross · waste 0% -> 0 SF

diagdense · waste 0% -> 0 SF

horiz · waste 0% -> 0 SF

vert · waste 0% -> 0 SF


grid · waste 0% -> 0 SF

BY SHEET

C-300 · p1 · page 1 · 20 item(s)

	FH 1 EA
	VALVE 5 EA
	SSMH 9 EA
	CO 2 EA
	CB 1 EA
	SS-8IN 400 LF
	SS-6IN-SERV 98.3 LF

CAUTION:
ALL CONSTRUCTION TRUCK TRAFFIC SHALL BE BETWEEN 9 AM AND 4 PM, OR ON WEEKENDS WITH TWO FLAGMEN PRESENT DURING OPERATIONS.

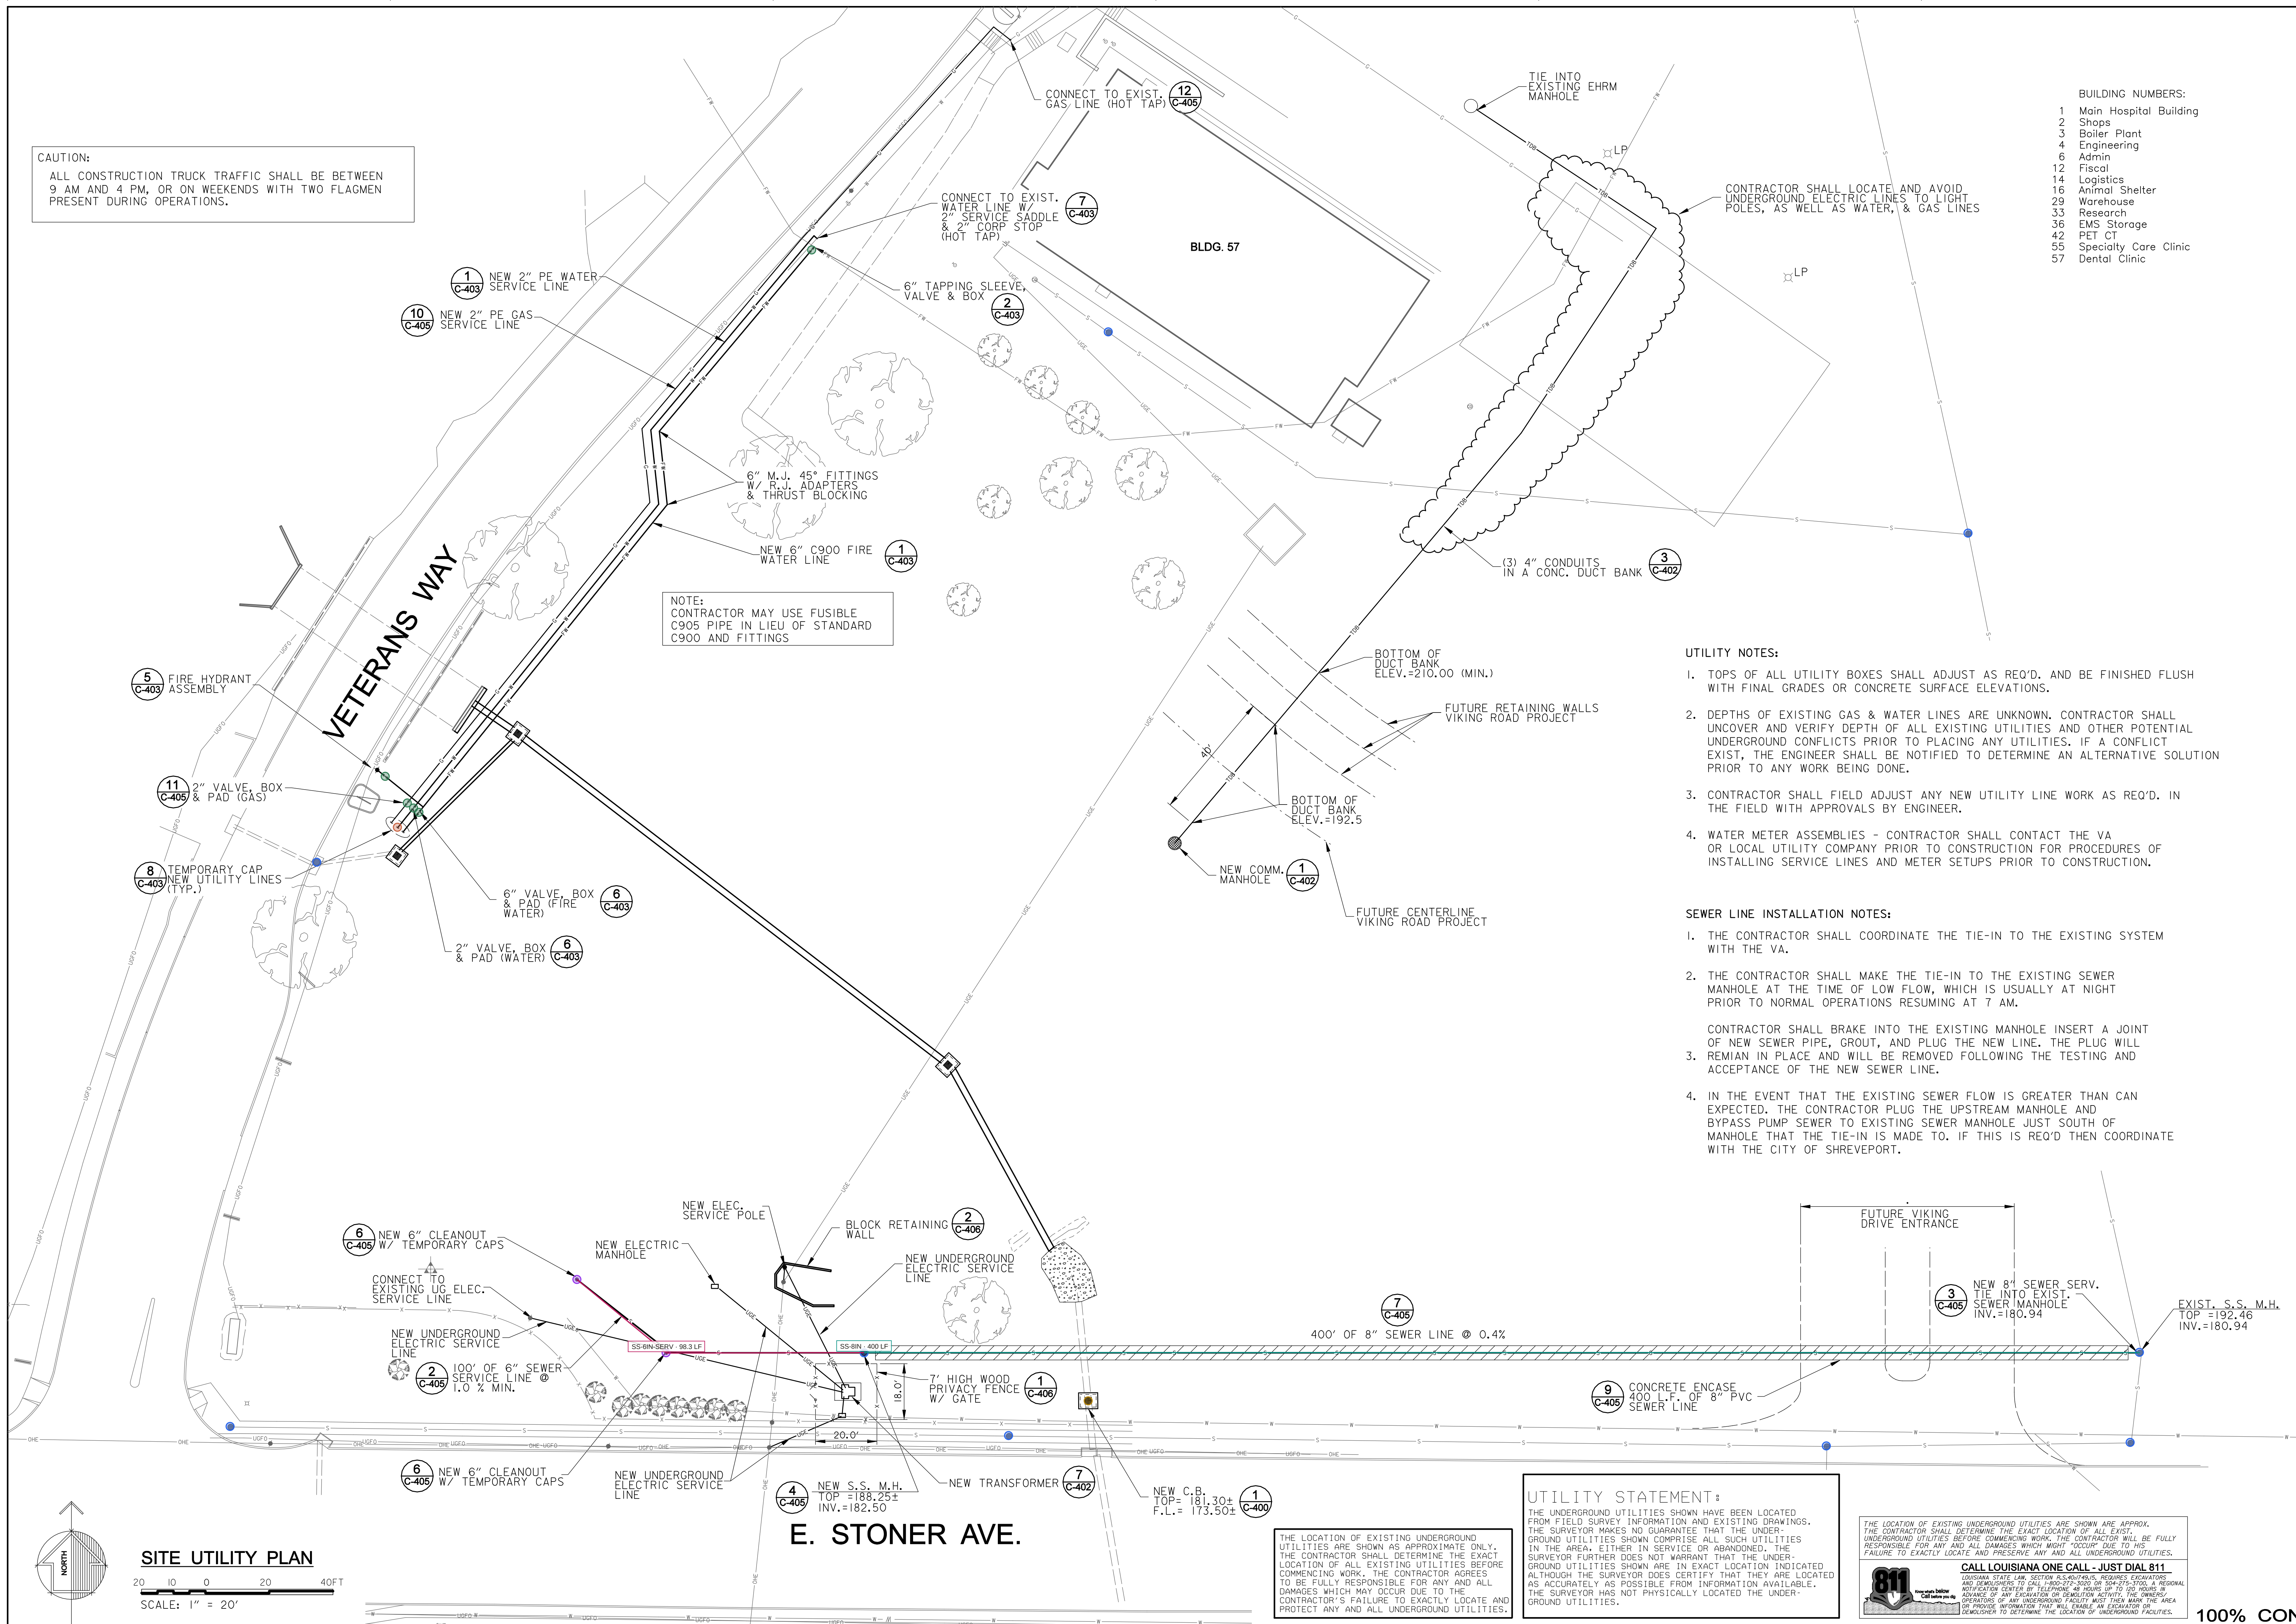

SHEET NOTES:

1. CONTRACTOR SHALL COORDINATE ALL WORK WITH THE VA HOSPITAL ENGINEERING OFFICE.
2. ALL ASPHALT ROADWAYS AND PARKING AREAS SHALL BE OPEN CUT UNLESS OTHERWISE NOTED. COORDINATE WITH THE VA ENGINEERING OFFICE.
3. ALL CONCRETE SIDEWALKS, ROADWAYS, OR PARKING LOTS SURFACES THAT ARE OPEN CUT SHALL BE RESTORED TO ORIGINAL CONDITIONS.

LEGEND:

- FW FIRE WATER LINE
- W DOMESTIC WATER LINE
- S SEWER SERVICE LINE
- SEWER CLEANOUT
- SEWER MANHOLE
- G GAS LINE
- TDB TELECOM. DUCT BANK
- UGF UNDERGROUND FIBER OPTIC LINE

KEY NOTES:

KEY PLAN

SCALE: NO SCALE

- SHEET LAYOUT
- AREA OF WORK

UTILITY STATEMENT:

THE LOCATION OF EXISTING UNDERGROUND UTILITIES SHOWN HAVE BEEN LOCATED FROM FIELD SURVEY INFORMATION AND EXISTING DRAWINGS. THE SURVEYOR MAKES NO GUARANTEE THAT THE UNDERGROUND UTILITIES SHOWN COMPRISE ALL SUCH UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED. THE SURVEYOR FURTHER DOES NOT WARRANT THAT THE UNDERGROUND UTILITIES SHOWN ARE IN EXACT LOCATION INDICATED. ALTHOUGH THE SURVEYOR DOES CERTIFY THAT THEY ARE LOCATED AS ACCURATELY AS POSSIBLE FROM INFORMATION AVAILABLE, THE SURVEYOR HAS NOT PHYSICALLY LOCATED THE UNDERGROUND UTILITIES.

THE LOCATION OF EXISTING UNDERGROUND UTILITIES ARE SHOWN AS APPROX. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL EXIST. UNDERGROUND UTILITIES BEFORE COMMENCING WORK. THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES WHICH MIGHT OCCUR DUE TO HIS FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL UNDERGROUND UTILITIES.

CALL LOUISIANA ONE CALL - JUST DIAL 811


LOUISIANA STATE ONE CALL (800) 368-8888, (504) 755-7700, A REGIONAL NOTIFICATION CENTER BY TELEPHONE 24 HOURS UP TO 120 HOURS ADVANCE OF ANY EXCAVATION OR INSTALLATION OF UNDERGROUND OPERATIONS OF ANY UNDERGROUND FACILITY MUST THEN MARK THE AREA OR PROVIDE INFORMATION THAT WILL ENABLE AN ELEVATOR OR DEDICATED TO DETERMINE THE LOCATION OF UNDERGROUND FACILITIES.

100% CONSTRUCTION DOCUMENTS

CONSULTANTS:

APOGEE
Engineers | Architects

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

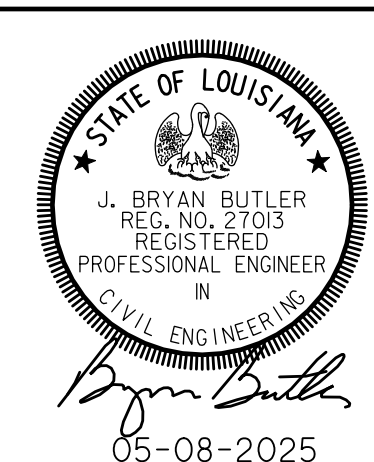

VA U.S. Department of Veterans Affairs

PROJECT MANAGER

Ballard Project Number 244200

Ballard CLC, Inc.
Architects • Engineers • Surveyors
1009 Bayou Place
Alexandria, LA 71303
Tel. (318) 445-6571 Fax. (318) 448-0257



Office of
Construction
and Facilities
Management

VA U.S. Department of Veterans Affairs

Drawing Title

SITE UTILITY PLAN

Location

OVERTON BROOKS VA MEDICAL CENTER
510 E STONER AVE.
SHREVEPORT, LA. 71101

Project Title

FISHER HOUSE SITE PREP

Approved

Date
May 8, 2025

Checked
BCLC

Drawn
BCLC

VA PROJECT NUMBER

667-23-113

Building Number

N/A

Drawing Number

C-300

Dwg. 6 of 16