

VA Dublin 9A A-601 benchmark

1 marked sheet · 12 takeoff items · quantities net of deducts, waste-adjusted where noted

Finish assignment: 12 agent-asserted · 12 pending human review

CONDITIONS

 CFT-1	326.8 SF
 CTB-1	171 LF
 CWT-1	171 LF

diag · waste 8% -> 352.9 SF

diag2 · waste 0% -> 0 SF

cross · waste 0% -> 0 SF

BY SHEET

A-601 · p1 · page 1 · 12 item(s)

 CFT-1	326.8 SF
 CTB-1	171 LF
 CWT-1	171 LF

Machine generated by OpenPlant HGP - 12 Sheets printing layout view

PHASE I - ROOM FINISH SCHEDULE


FINISH ABBREVIATIONS

ACT	ACOUSTICAL CEILING TILE
CBT	CERAMIC BASE TILE
CFT	CERAMIC FLOOR TILE
CPT	CARPET TILE
CWT	CERAMIC WALL TILE
GYP	GYPSUM BOARD
LVT	LUXURY VINYL TILE
PT	PAINT
EP	EPOXY
EXP	EXPOSED
RB	RUBBER BASE
PRB	PREMIUM RUBBER BASE
WC	WALL COVERING
PLAM	PLASTIC LAMINATE
SDSF	SOLID SURFACE


FINISH PLAN LEGEND

	LVT-1
	LVT-2

ROOM #	ROOM NAME	CEILING FINISH	FLOOR FINISH	BASE		WAINSCOT		WALL FINISH				COMMENTS
				MAT	HT	MAT	HT	EAST	NORTH	SOUTH	WEST	
100	TR	--	EXP	RB-1	4"	--	--	PT-2	PT-2	PT-2	PT-2	APPLY ANTI-STATIC COATING TO EXPOSED CONCRETE FLOORING
101	MECHANICAL	--	EXP	RB-1	4"	--	--	PT-2	PT-2	PT-2	PT-2	
102	HAC	ACT-1	EP-1	RB-1	4"	--	--	PT-2	PT-2	PT-2	PT-2	
103	IV TESTING	ACT-1	CPT-1	RB-1	4"	--	--	PT-2	PT-2	PT-3	PT-2	PT-3 (ACCENT) ON SOUTH WALL
103A	STG											
104	IV SUPPORT	ACT-1	CPT-1	RB-1	4"	--	--	PT-2	PT-2	PT-3	PT-2	PT-3 (ACCENT) ON SOUTH WALL
105	WAITING ALCOVE	GYP	LVT-1	RB-1	4"	--	--	PT-1	PT-1	PT-1	PT-1	
106	IV TESTING	ACT-1	CPT-1	RB-1	4"	--	--	PT-2	PT-2	PT-3	PT-2	PT-3 (ACCENT) ON SOUTH WALL
107	STAFF BREAK	ACT-1	LVT-2	RB-1	4"	--	--	PT-3	PT-1	PT-1	PT-1	PLAM-1, SDSF-1, PT-3 (ACCENT) ON EAST WALL
108	CHANGE MGMT USER	ACT-1	CPT-1	RB-1	4"	--	--	PT-2	PT-2	PT-3	PT-2	PT-3, (ACCENT) ON SOUTH WALL
109	MECHANICAL	--	EXP	RB-1	4"	--	--	PT-2	PT-2	PT-2	PT-2	
110	RESTROOM	ACT-1	CFT-1	CTB-1	4"	CWT-1	4' - 0"	WC-1	WC-1	WC-1	WC-1	REFERENCE AE424 FOR TILE ELEVATIONS
111	RESTROOM	ACT-1	CFT-1	CTB-1	4"	CWT-1	4' - 0"	WC-1	WC-1	WC-1	WC-1	REFERENCE AE424 FOR TILE ELEVATIONS
112	RESTROOM	ACT-1	CFT-1	CTB-1	4"	CWT-1	4' - 0"	WC-1	WC-1	WC-1	WC-1	REFERENCE AE424 FOR TILE ELEVATIONS
113	RESTROOM	ACT-1	CFT-1	CTB-1	4"	CWT-1	4' - 0"	WC-1	WC-1	WC-1	WC-1	REFERENCE AE424 FOR TILE ELEVATIONS
114	STORAGE	ACT-1	EP-1	RB-1	4"	--	--	PT-2	PT-2	PT-2	PT-2	
115	ELECTRICAL CLOSET	--	EP-1	RB-1	4"	--	--	PT-2	PT-2	PT-2	PT-2	
116	ELECTRICAL ROOM	--	EP-1	RB-1	4"	--	--	PT-2	PT-2	PT-2	PT-2	
CR11-9	CORRIDOR	ACT-1	LVT-1 / LVT-2	PRB-1	4"	--	--	PT-1	PT-1	PT-1	PT-1	
CR11-10	CORRIDOR	ACT-1	LVT-1 / LVT-2	PRB-1	4"	--	--	PT-1	PT-1	PT-1	PT-1	

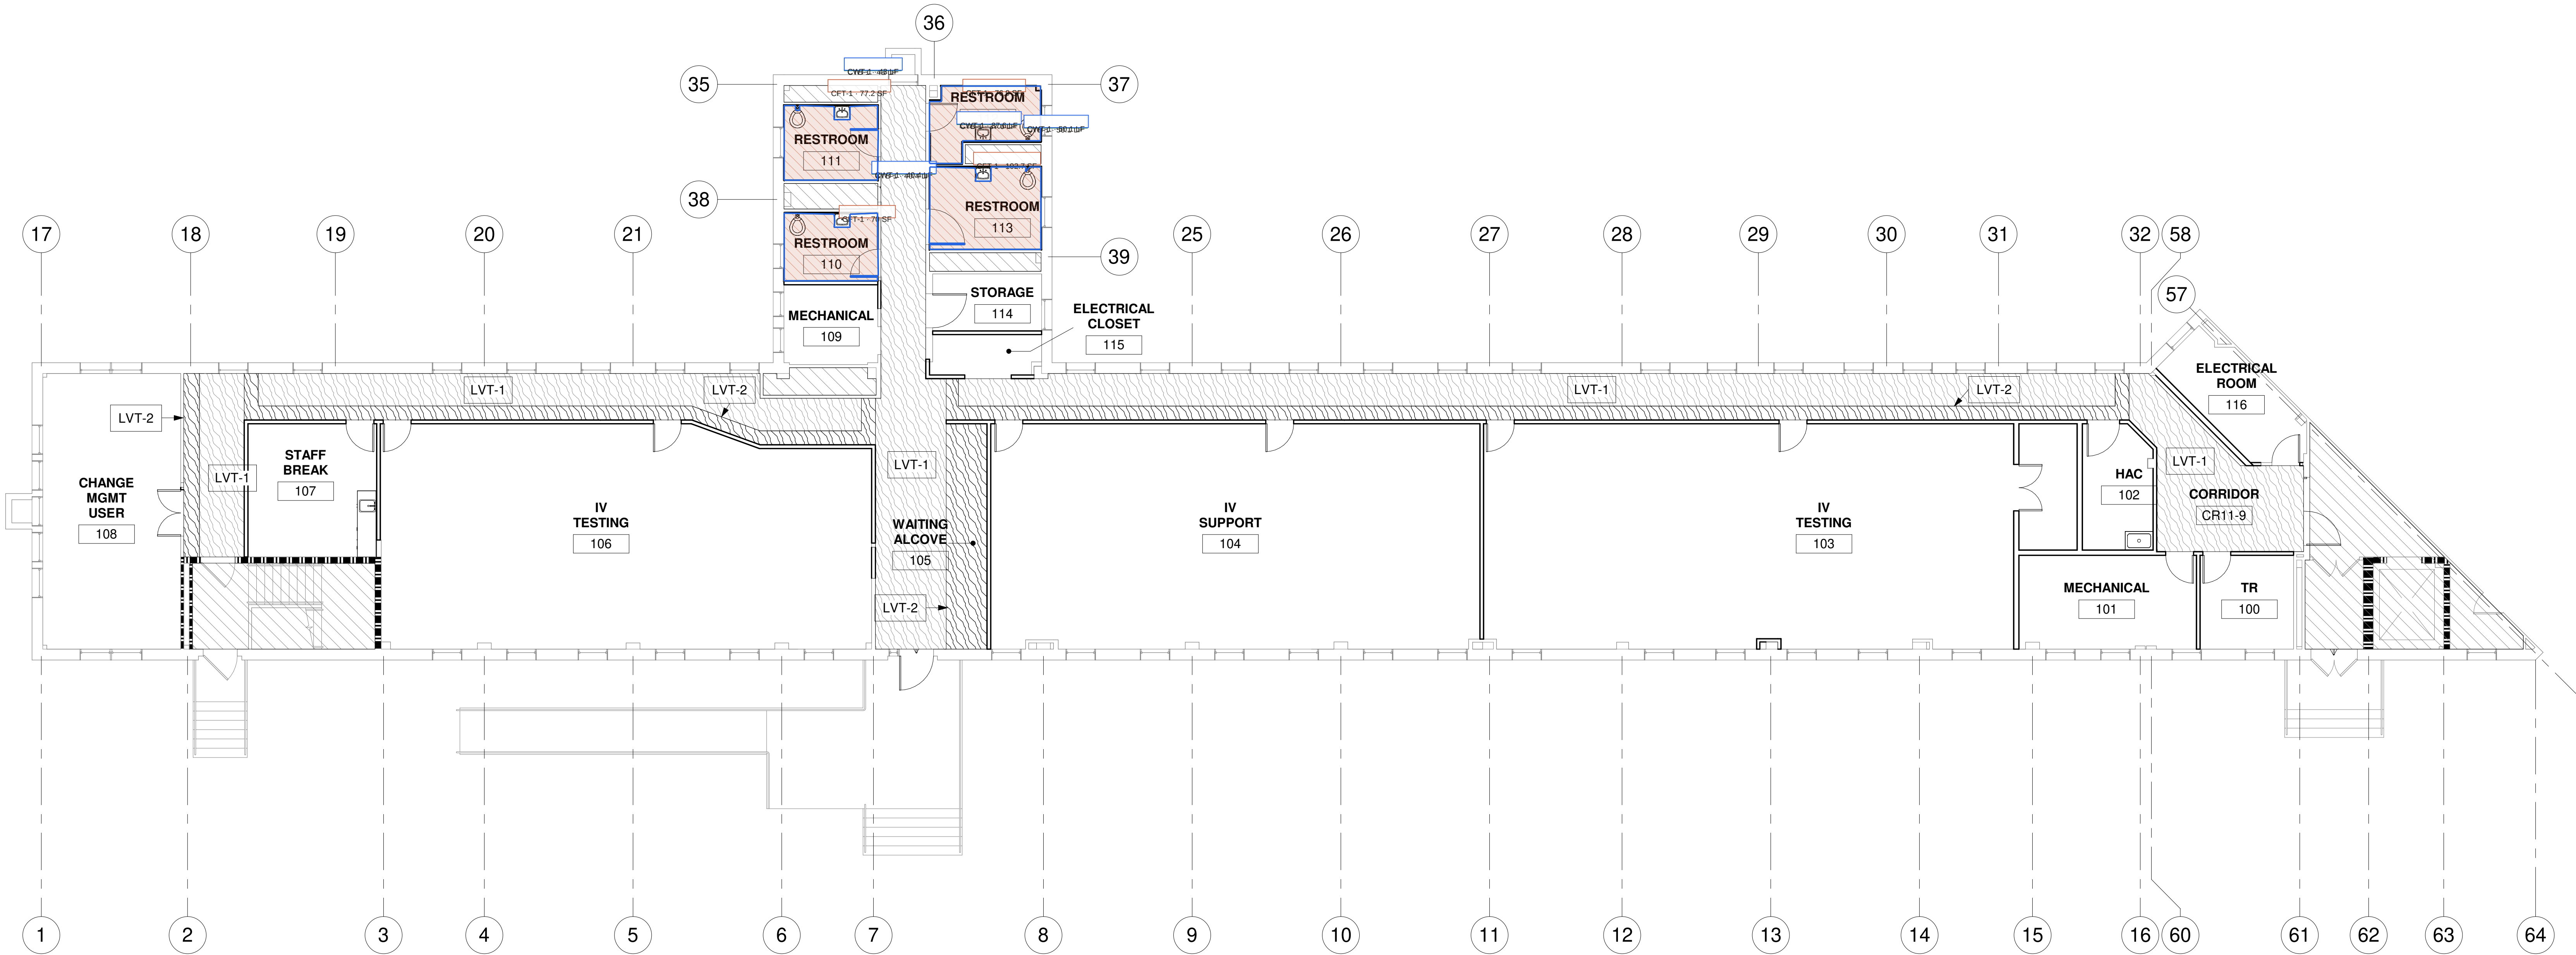

1 FLOOR PLAN - PHASE I - FINISH PLAN
1/8" = 1'-0"



Revisions:	Date:

CONSULTANT
ENGINEERING DISCIPLINE:

ARCHITECT/ENGINEER OF RECORD
A/E:
SPEES DESIGN BUILD
625 1ST AVE, STE 301
SEATTLE, WA 98104
(206) 590-2118
RAY SPEES



Office of
Construction
and Facilities
Management
VA U.S. Department
of Veterans Affairs

Drawing Title
FINISH SCHEDULE

Approved:

Phase
CONSTRUCTION
DOCUMENT

FULLY SPRINKLERED

Project Title
RENOVATE BUILDING 9A FOR
EHRM ADMINISTRATIVE SPACE

Location
CARL VINSON VA MEDICAL CENTER - DUBLIN, GA

Issue Date
6/14/2024

Checked
MC

Drawn
EB

Project Number
557-21-703
Building Number
009A

Drawing Number
A-601

33 OF 102